

CSE 3214: Computer Network Protocols and Applications

Dr. Peter Lian, Professor
Department of Computer Science and Engineering
York University
Email: peterlian@cse.yorku.ca
Office: 1012C Lassonde Building

Introduction 1-1


CSE 3214 Course Overview

- ❖ Topic covered
 - Introduction to computer networks and the Internet
 - Protocol layers and their service models
 - Application layer
 - Transport layer
 - Network layer
 - Security in computer networks
- ❖ Lecture time
 - Tue & Thur: 10:00 – 11:30am @TEL1005

Introduction 1-2

Text Book

- ❖ Text book:
“Computer Networks: A Top-Down Approach”, 6th Edition, by James F. Kurose & Keith W. Ross
Published by Pearson,
ISBN: 9780132856201
- ❖ Book companion website:
 - http://wps.pearsoned.com/e_cs_kurose_compnetw_6/



*Computer
Networking: A Top
Down Approach*
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

Introduction 2-3

Grading Scheme & Resources

- ❖ Grading scheme
 - Lab assignments and programming project: 30%
 - Midterm: 25 %
 - Final: 45%
- ❖ Course website:
 - http://wiki.cse.yorku.ca/course_archive/2012-13/W/3214
- ❖ Teaching Assistant:
Dusan Stevanovic, email: dusan@cse.yorku.ca

Introduction 2-4

Chapter 1: Introduction

our goal:

- ❖ get “feel” and terminology
- ❖ more depth, detail *later* in course
- ❖ approach:
 - use Internet as example

overview:

- ❖ what’s the Internet?
- ❖ what’s a protocol?
- ❖ network edge; hosts, access net, physical media
- ❖ network core: packet/circuit switching, Internet structure
- ❖ performance: loss, delay, throughput
- ❖ security
- ❖ protocol layers, service models
- ❖ history

Introduction 1-5

Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security

1.7 history

Introduction 1-6

What's the Internet: "nuts and bolts" view




- ❖ millions of connected computing devices:
 - *hosts* = *end systems*
 - running *network apps*



- ❖ *communication links*
 - fiber, copper, radio, satellite
 - transmission rate: *bandwidth*




- ❖ *Packet switches*: forward packets (chunks of data)
 - *routers* and *switches*

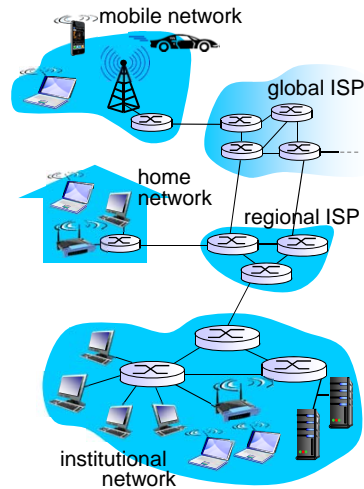

Introduction 1-7

What's the Internet: "nuts and bolts" view


- ❖ *Internet*: "network of networks"
 - Interconnected ISPs
- ❖ *protocols* control sending, receiving of msgs
 - e.g., TCP, IP, HTTP, Skype, 802.11
- ❖ *Internet standards*
 - RFC: Request for comments
 - IETF: Internet Engineering Task Force

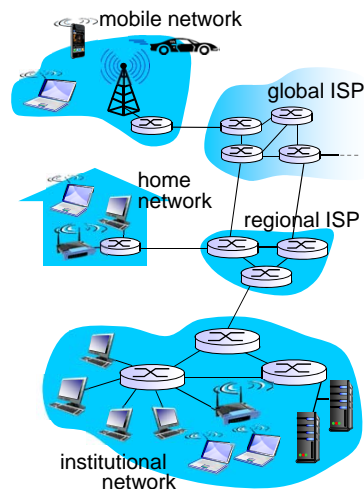

Introduction 1-8


What's the Internet: a service view

- ❖ *Infrastructure that provides services to applications:*
 - Web, VoIP, email, games, e-commerce, social nets, ...
- ❖ *provides programming interface to apps*
 - hooks that allow sending and receiving app programs to "connect" to Internet
 - provides service options, analogous to postal service

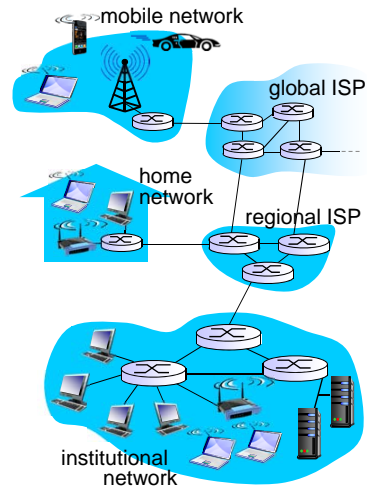


Introduction 1-9

Internet Traffic Trend

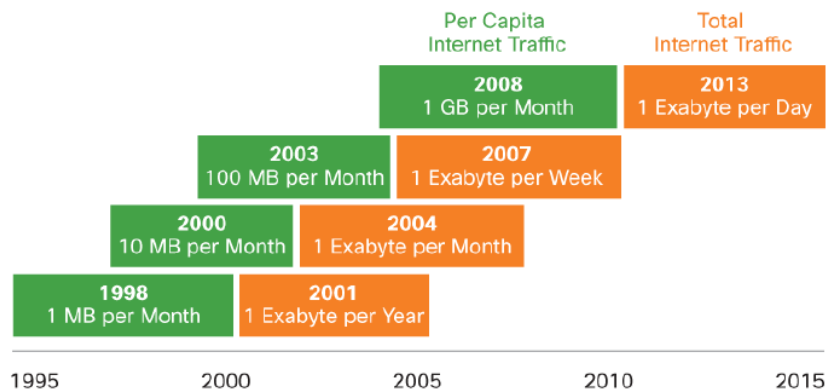

By the end of 2015, annual global IP traffic will reach the zettabyte (10^{21}) threshold

Network Traffic (2015)

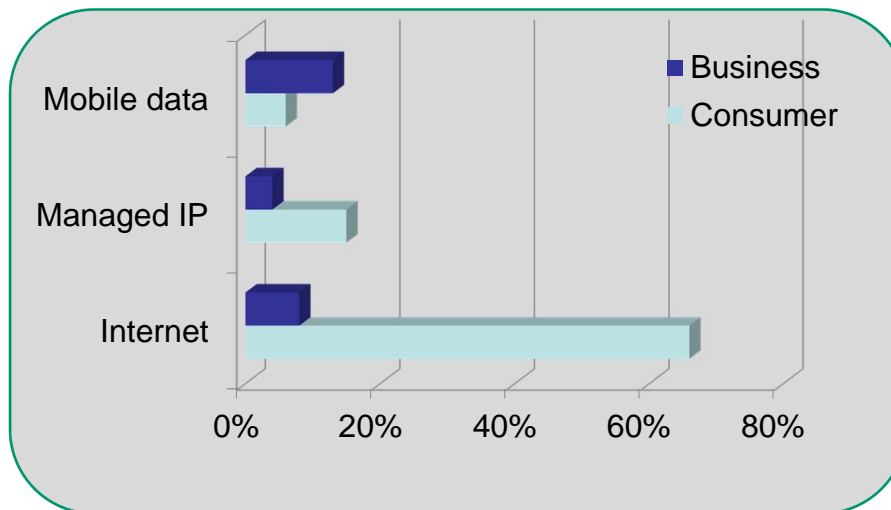

Source: Cisco VNI, 2011

What Comes Next?



Source: <http://www.youtube.com/watch?v=-2faggNVQtM>
OLED Samsung Mobile Display

What's a protocol?

human protocols:

- ❖ “what's the time?”
- ❖ “I have a question”
- ❖ introductions

... specific msgs sent

... specific actions taken
when msgs received, or
other events

network protocols:


- ❖ machines rather than humans
- ❖ all communication activity in Internet governed by protocols

*protocols define format, order
of msgs sent and received
among network entities,
and actions taken on msg
transmission, receipt*

Introduction 1-13

What's a protocol?

a human protocol and a computer network protocol:

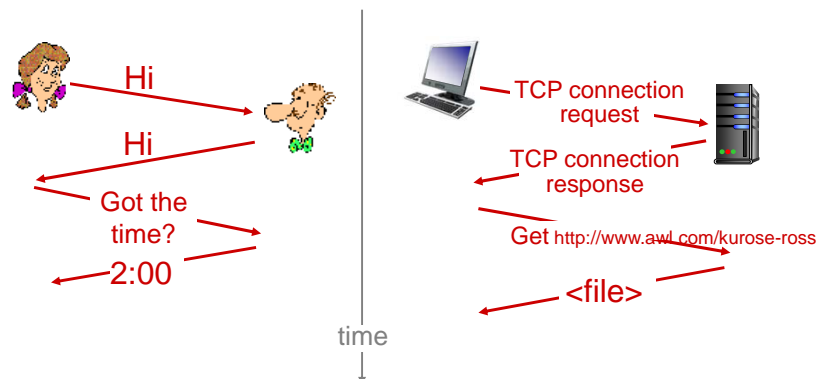

Q: other human protocols?

Introduction 1-14

Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security

1.7 history

Introduction 1-15

A closer look at network structure:


❖ network edge:

- hosts: clients and servers
- servers often in data centers

❖ access networks, physical media: wired, wireless communication links

❖ network core:

- interconnected routers
- network of networks

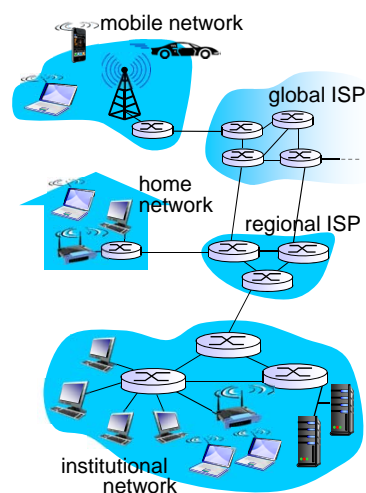

Introduction 1-16


Access networks and physical media

Q: How to connect end systems to edge router?

- ❖ residential access nets
- ❖ institutional access networks (school, company)
- ❖ mobile access networks


keep in mind:

- ❖ bandwidth (bits per second) of access network?
- ❖ shared or dedicated?

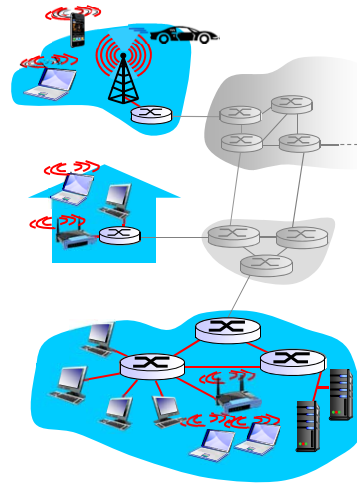

Introduction 1-17


Access net: digital subscriber line (DSL)

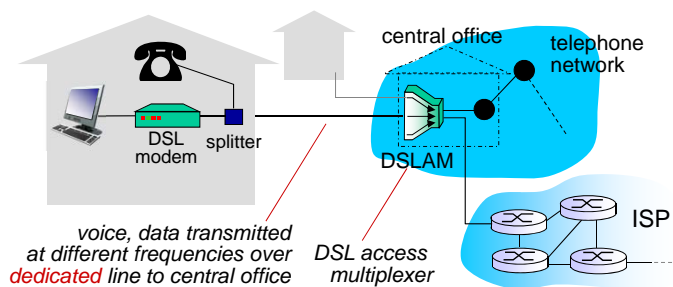

- ❖ use *existing* telephone line to central office DSLAM
 - data over DSL phone line goes to Internet
 - voice over DSL phone line goes to telephone net
- ❖ < 2.5 Mbps upstream transmission rate (typically < 1 Mbps)
- ❖ < 24 Mbps downstream transmission rate (typically < 10 Mbps)

Introduction 1-18


Access net: cable network

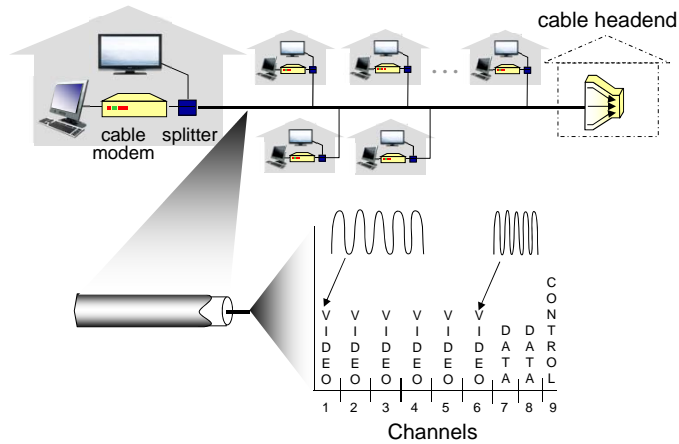

frequency division multiplexing: different channels transmitted in different frequency bands

Introduction 1-19

Access net: cable network

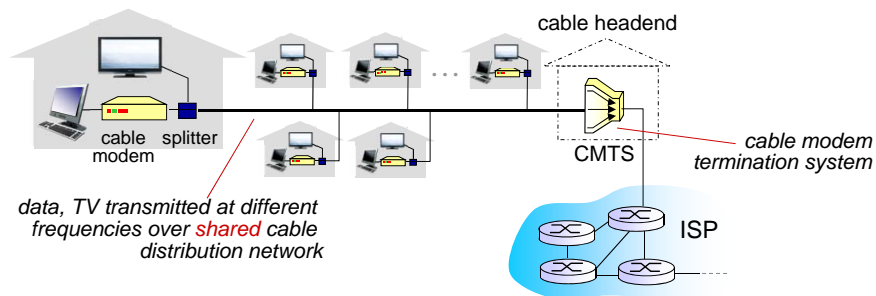

❖ HFC: hybrid fiber coax


- asymmetric: up to 30Mbps downstream transmission rate, 2 Mbps upstream transmission rate

❖ network of cable, fiber attaches homes to ISP router

- homes **share access network** to cable headend
- unlike DSL, which has dedicated access to central office


Introduction 1-20

Access net: home network

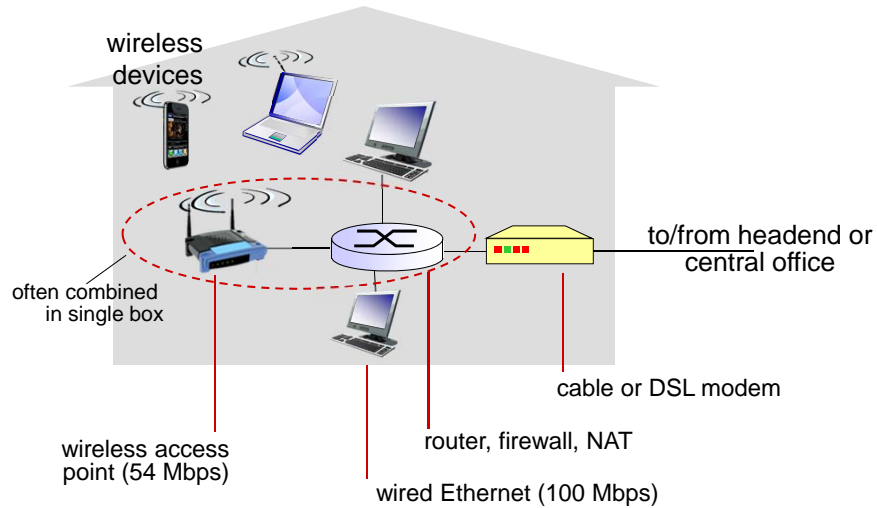

Introduction 1-21

Enterprise access networks (Ethernet)

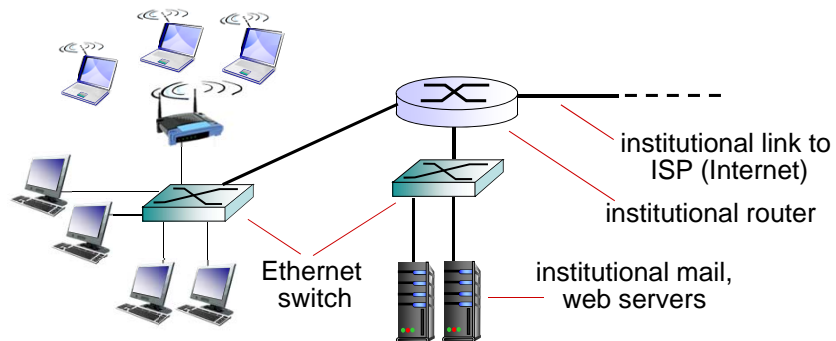

- ❖ typically used in companies, universities, etc
- ❖ 10 Mbps, 100Mbps, 1Gbps, 10Gbps transmission rates
- ❖ today, end systems typically connect into Ethernet switch


Introduction 1-22

Wireless access networks

- ❖ shared wireless access network connects end system to router
 - via base station aka “access point”

wireless LANs:

- within building (100 ft)
- 802.11b/g (WiFi): 11, 54 Mbps transmission rate



wide-area wireless access

- provided by telco (cellular) operator; 10's km
- between 1 and 10 Mbps
- 3G, 4G: LTE




Introduction 1-23

Host: sends packets of data

host sending function:

- ❖ takes application message
- ❖ breaks into smaller chunks, known as *packets*, of length L bits
- ❖ transmits packet into access network at *transmission rate R*
 - link transmission rate, aka link *capacity*, aka *link bandwidth*

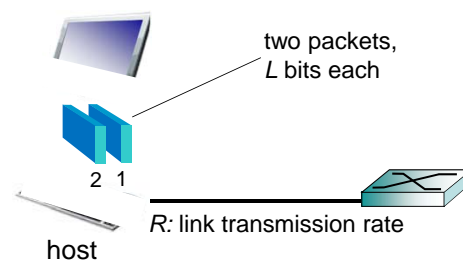

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

1-24

Physical media

- ❖ **bit:** propagates between transmitter/receiver pairs
- ❖ **physical link:** what lies between transmitter & receiver
- ❖ **guided media:**
 - signals propagate in solid media: copper, fiber, coax
- ❖ **unguided media:**
 - signals propagate freely, e.g., radio

twisted pair (TP)

- ❖ two insulated copper wires
 - Category 5: 100 Mbps, 1 Gbps Ethernet
 - Category 6: 10Gbps



Introduction 1-25

Physical media: coax, fiber

coaxial cable:

- ❖ two concentric copper conductors
- ❖ bidirectional
- ❖ broadband:
 - multiple channels on cable
 - HFC



fiber optic cable:

- ❖ glass fiber carrying light pulses, each pulse a bit
- ❖ high-speed operation:
 - high-speed point-to-point transmission (e.g., 10's-100's Gbps transmission rate)
- ❖ low error rate:
 - repeaters spaced far apart
 - immune to electromagnetic noise



Introduction 1-26

Physical media: radio

- ❖ signal carried in electromagnetic spectrum
- ❖ no physical “wire”
- ❖ bidirectional
- ❖ propagation environment effects:
 - reflection
 - obstruction by objects
 - interference

radio link types:

- ❖ **terrestrial microwave**
 - e.g. up to 45 Mbps channels
- ❖ **LAN** (e.g., WiFi)
 - 11 Mbps, 54 Mbps
- ❖ **wide-area** (e.g., cellular)
 - 3G cellular: ~ few Mbps
- ❖ **satellite**
 - Kbps to 45Mbps channel (or multiple smaller channels)
 - 270 msec end-end delay
 - geosynchronous versus low altitude

Introduction 1-27


Chapter 1: roadmap

- 1.1 what is the Internet?
- 1.2 network edge
 - end systems, access networks, links
- 1.3 network core
 - packet switching, circuit switching, network structure
- 1.4 delay, loss, throughput in networks
- 1.5 protocol layers, service models
- 1.6 networks under attack: security
- 1.7 history

Introduction 1-28


The network core

- ❖ mesh of interconnected routers
- ❖ **packet-switching: hosts break application-layer messages into *packets***
 - forward packets from one router to the next, across links on path from source to destination
 - each packet transmitted at full link capacity

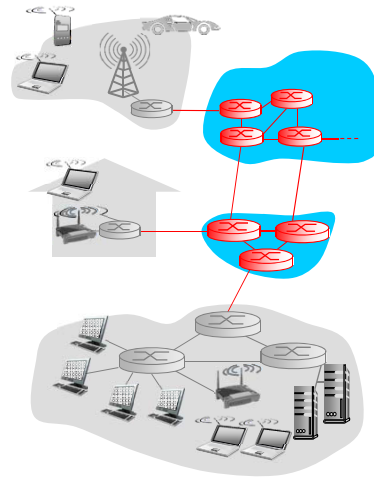

Introduction 1-29


Packet-switching: store-and-forward

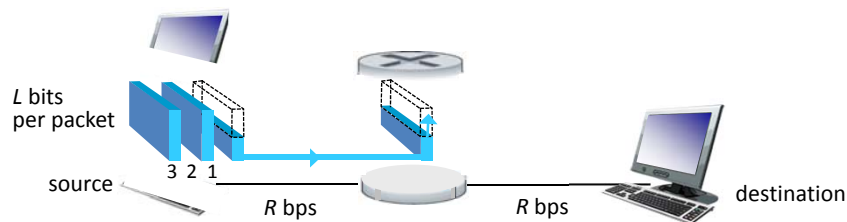

- ❖ takes L/R seconds to transmit (push out) L -bit packet into link at R bps
 - ❖ **store and forward:** entire packet must arrive at router before it can be transmitted on next link
 - ❖ end-end delay = $2L/R$ (assuming zero propagation delay)
- one-hop numerical example:*
- $L = 7.5$ Mbits
 - $R = 1.5$ Mbps
 - one-hop transmission delay = 5 sec
- } more on delay shortly ...

Introduction 1-30

Packet Switching: queueing delay, loss

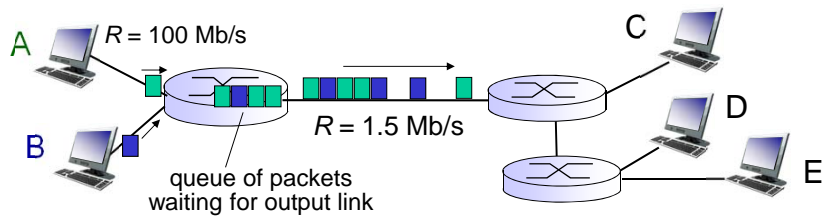

queueing and loss:

- ❖ If arrival rate (in bits) to link exceeds transmission rate of link for a period of time:
 - packets will queue, wait to be transmitted on link
 - packets can be dropped (lost) if memory (buffer) fills up


Introduction 1-31

Two key network-core functions

routing: determines source-destination route taken by packets

- *routing algorithms*

forwarding: move packets from router's input to appropriate router output

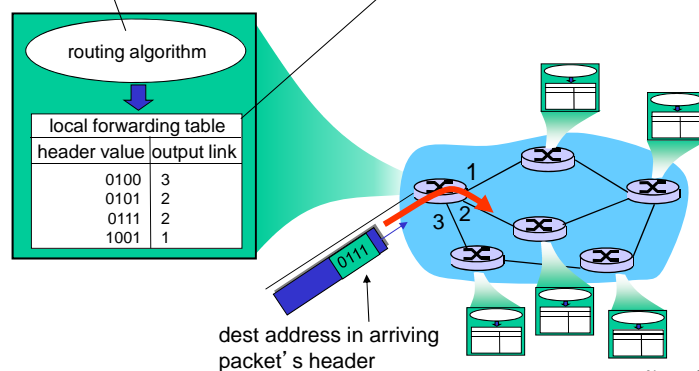


Network Layer 4-32

Alternative core: circuit switching

end-end resources allocated to, reserved for “call” between source & dest:


- ❖ In diagram, each link has four circuits.
 - call gets 2nd circuit in top link and 1st circuit in right link.
- ❖ dedicated resources: no sharing
 - circuit-like (guaranteed) performance
- ❖ circuit segment idle if not used by call (*no sharing*)
- ❖ Commonly used in traditional telephone networks

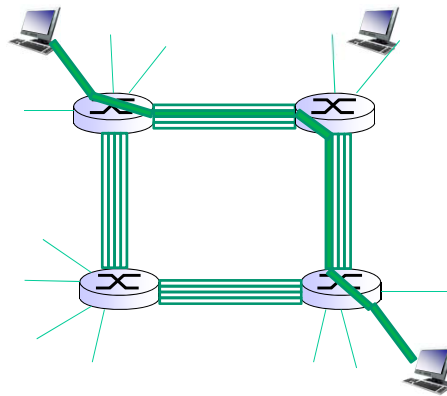


Introduction 1-33

Circuit switching: FDM versus TDM

FDM

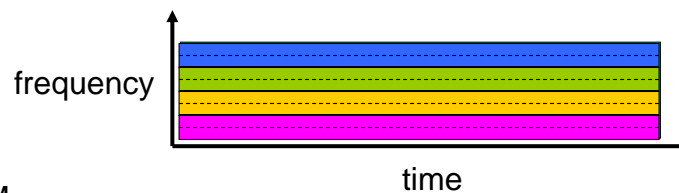

TDM

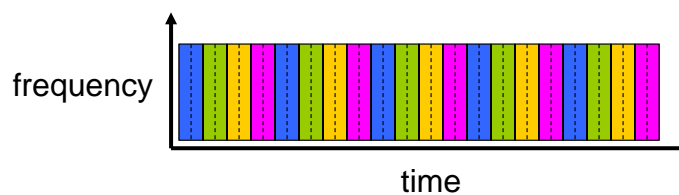

Example:

4 users




Introduction 1-34

Packet switching versus circuit switching

packet switching allows more users to use network!

example:

- 1 Mb/s link
- each user:
 - 100 kb/s when “active”
 - active 10% of time

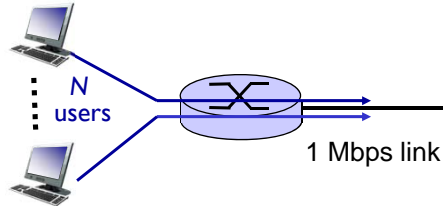

❖ *circuit-switching:*

- 10 users

Q: What if one user generates 1000 1kb data package while 9 other users are idle?

❖ *packet switching:*

- with 35 users, probability > 10 active at same time is less than .0004

Transmission delay:

Circuit-switching = ?

Packet switching = ?

* Check out the online interactive exercises for more examples

Introduction 1-35

Packet switching versus circuit switching

is packet switching a “slam dunk winner?”

- ❖ great for bursty data
 - resource sharing
 - simpler, no call setup
- ❖ *excessive congestion possible:* packet delay and loss
 - protocols needed for reliable data transfer, congestion control
- ❖ Q: *How to provide circuit-like behavior?*
 - bandwidth guarantees needed for audio/video apps
 - still an unsolved problem (chapter 7)


Introduction 1-36

Internet structure: network of networks

- ❖ End systems connect to Internet via **access ISPs** (Internet Service Providers)
 - Residential, company and university ISPs
- ❖ Access ISPs in turn must be interconnected.
 - ❖ So that any two hosts can send packets to each other
- ❖ Resulting network of networks is very complex
 - ❖ Evolution was driven by **economics** and **national policies**
- ❖ Let's take a stepwise approach to describe current Internet structure


Internet structure: network of networks

Question: given *millions* of access ISPs, how to connect them together?

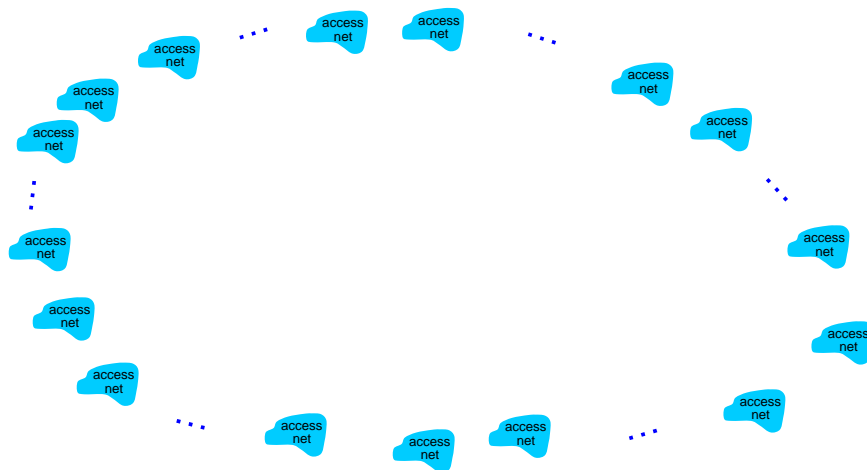


Internet structure: network of networks

Option: connect each access ISP to every other access ISP?

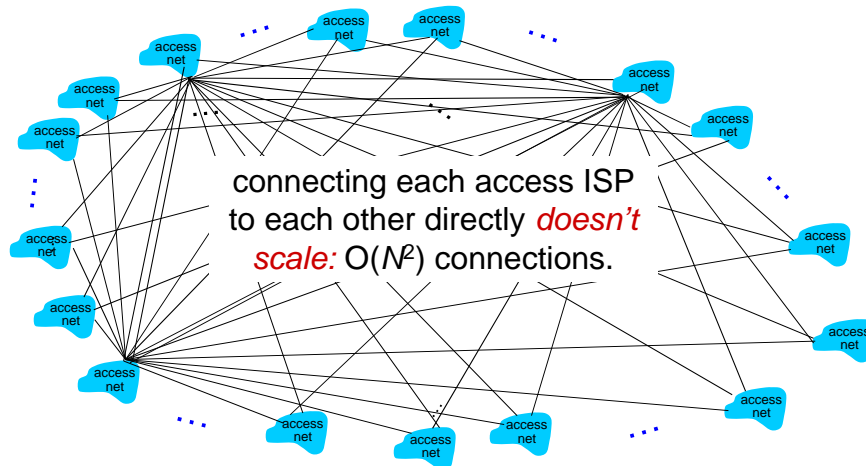

Internet structure: network of networks


Option: connect each access ISP to a global transit ISP? Customer and provider ISPs have economic agreement.

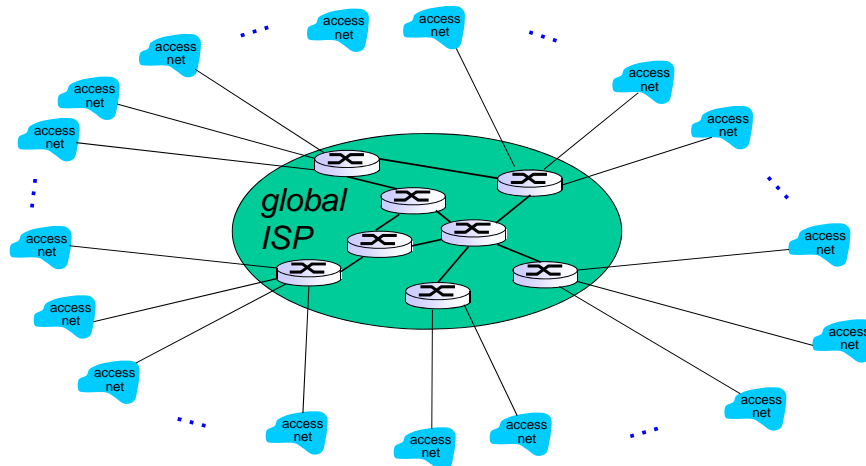

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors


....

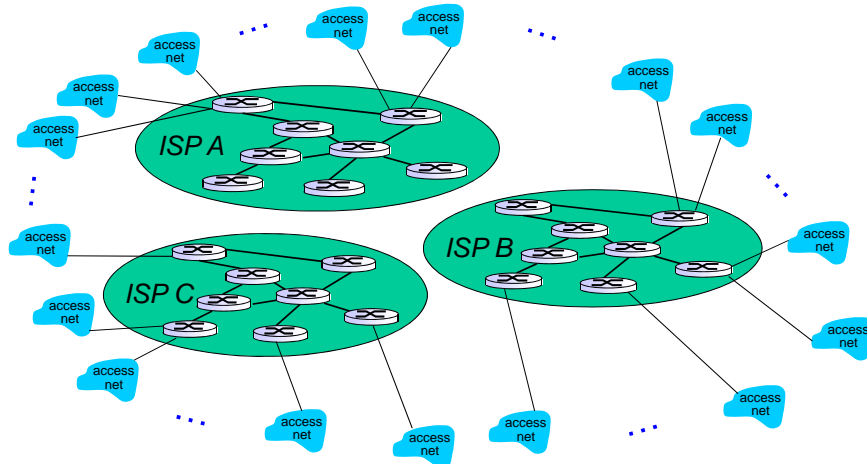

Internet structure: network of networks


But if one global ISP is viable business, there will be competitors

.... which must be interconnected

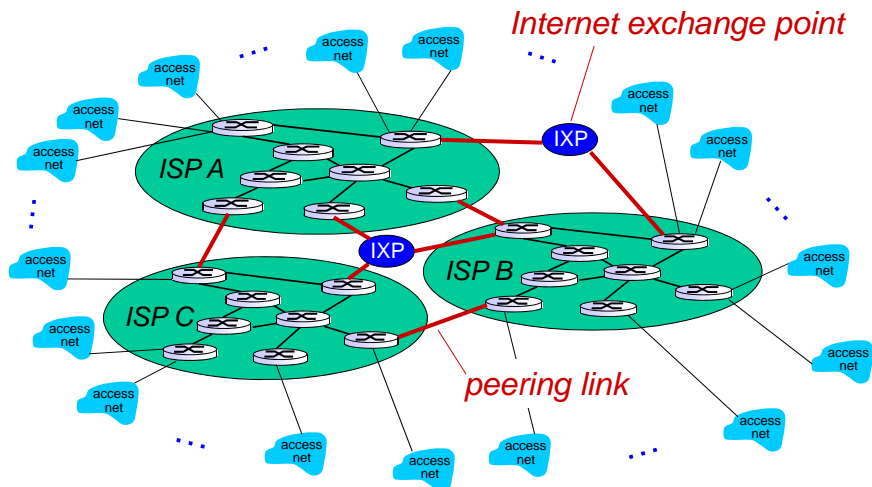


Internet structure: network of networks

... and regional networks may arise to connect access nets to ISPs

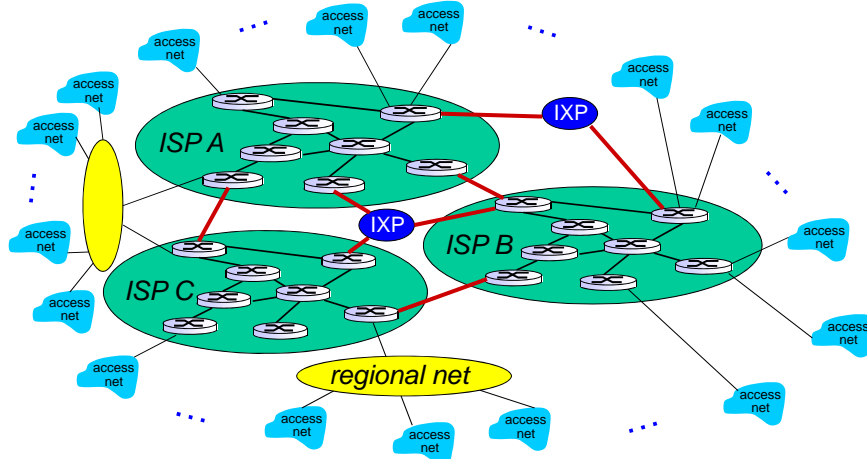


Internet structure: network of networks

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

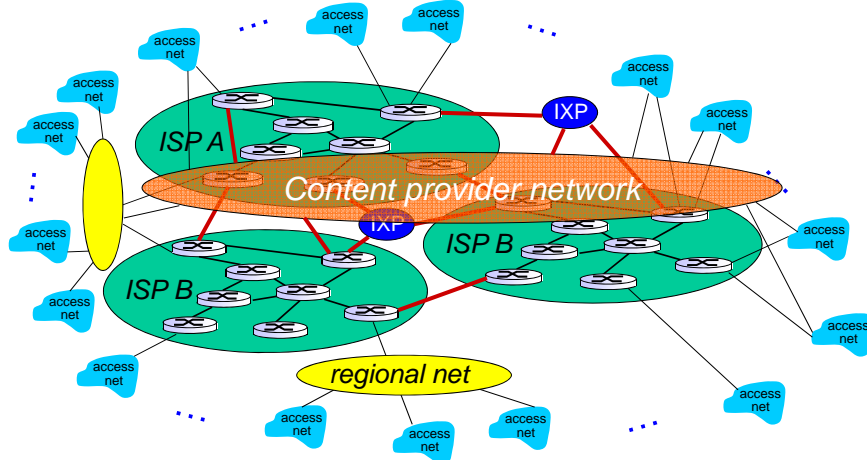


Internet structure: network of networks

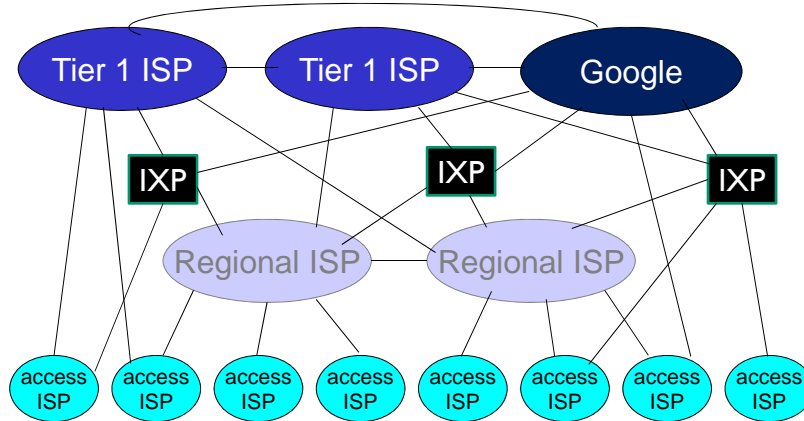

- ❖ at center: small # of well-connected large networks
 - “tier-1” commercial ISPs (e.g., Rogers, Bell, etc.), national & international coverage
 - content provider network (e.g., Google): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

Introduction 1-45

Tier-1 ISP: e.g., Sprint

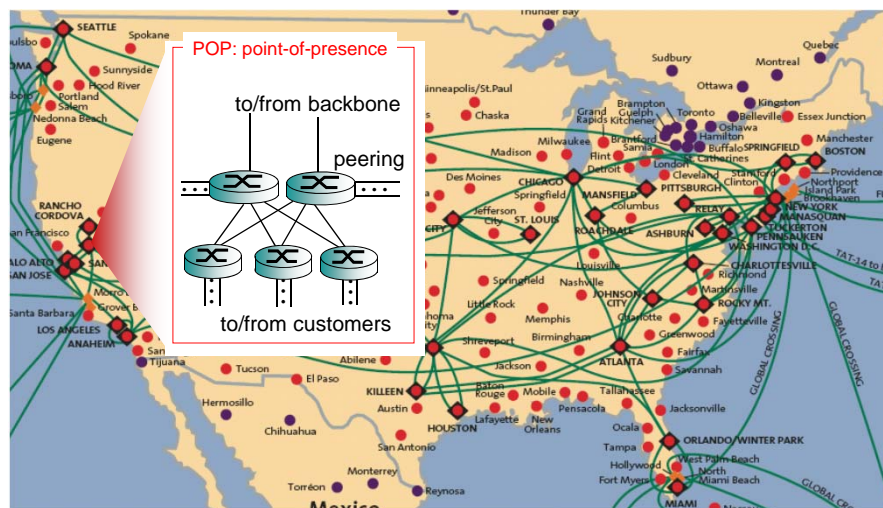

Introduction 1-46

Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security


1.7 history

Introduction 1-47

How do loss and delay occur?


packets *queue* in router buffers

- ❖ packet arrival rate to link (temporarily) exceeds output link capacity
- ❖ packets queue, wait for turn

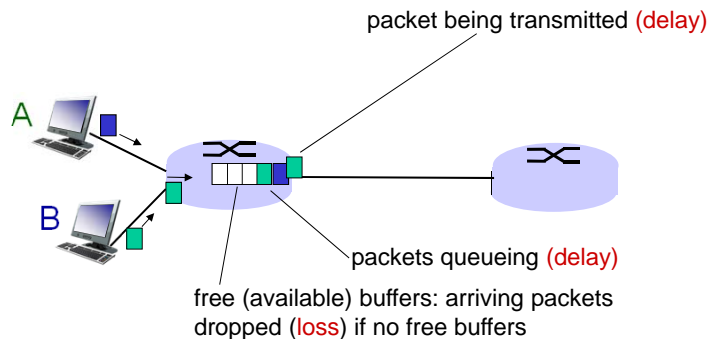

Introduction 1-48

Four sources of packet delay

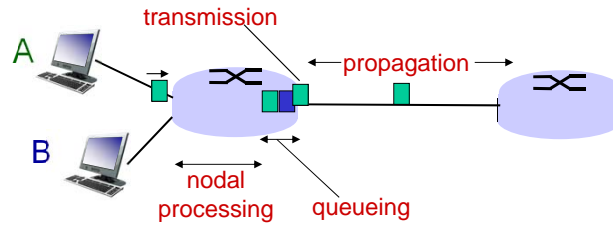

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{proc} : nodal processing


- check bit errors
- determine output link
- typically < msec

d_{queue} : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Introduction 1-49

Four sources of packet delay

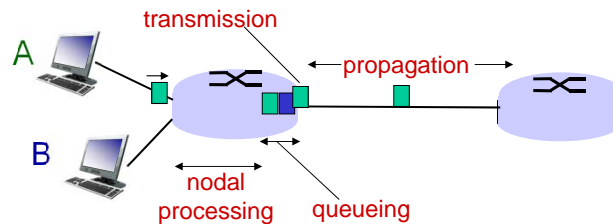

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{trans} : transmission delay:

- L : packet length (bits)
- R : link bandwidth (bps)
- $d_{\text{trans}} = L/R$

d_{prop} : propagation delay:


- d : length of physical link
- s : propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
- $d_{\text{prop}} = d/s$

d_{trans} and d_{prop}
very different

* Check out the Java applet for an interactive animation on trans vs. prop delay

Introduction 1-50


Caravan analogy

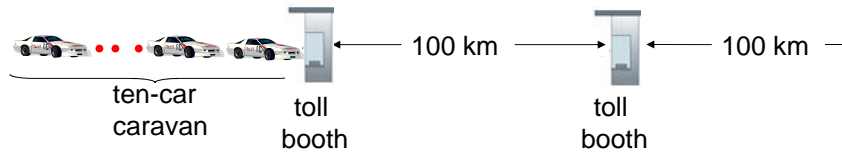

- ❖ cars “propagate” at 100 km/hr
- ❖ toll booth takes 12 sec to service car (bit transmission time)
- ❖ car~bit; caravan ~ packet
- ❖ **Q: How long until caravan is lined up before 2nd toll booth?**
 - time to “push” entire caravan through toll booth onto highway = $12 \times 10 = 120$ sec
 - time for last car to propagate from 1st to 2nd toll booth: $100\text{km}/(100\text{km/hr}) = 1$ hr
 - **A: 62 minutes**

Introduction 1-51

Caravan analogy (more)




- ❖ suppose cars now “propagate” at 1000 km/hr
- ❖ and suppose toll booth now takes one min to service a car
- ❖ **Q: Will cars arrive to 2nd booth before all cars serviced at first booth?**
 - **A: Yes!** after 7 min, 1st car arrives at second booth; three cars still at 1st booth.


Introduction 1-52

Queueing delay (revisited)

- ❖ R : link bandwidth (bps)
- ❖ L : packet length (bits)
- ❖ a : average packet arrival rate
- ❖ La : traffic intensity

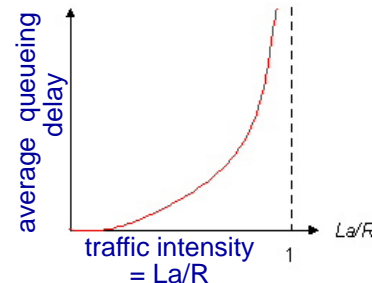

- ❖ $La/R \sim 0$: avg. queueing delay small
- ❖ $La/R \sim 1$: avg. queueing delay large
- ❖ $La/R > 1$: more “work” arriving than can be serviced, average delay infinite!




* Check out the Java applet for an interactive animation on queueing and loss

Introduction 1-53

“Real” Internet delays and routes

- ❖ what do “real” Internet delay & loss look like?
- ❖ **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination.
 - source send $3*N$ special packages to the destination containing $(N-1)$ routers in-between
 - groups of 3 packages are marked from 1 to N
 - once i^{th} router receives i^{th} package, it sends a short message to source
 - sender times interval between transmission and reply.



Introduction 1-54

“Real” Internet delays, routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

3 delay measurements from
gaia.cs.umass.edu to cs-gw.umass.edu

```

1 cs-gw (128.119.240.254) 1 ms 1 ms 2 ms
2 border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145) 1 ms 1 ms 2 ms
3 cht-vbns.gw.umass.edu (128.119.3.130) 6 ms 5 ms 5 ms
4 jn1-at1-0-0-19.wor.vbns.net (204.147.132.129) 16 ms 11 ms 13 ms
5 jn1-so7-0-0-0.wae.vbns.net (204.147.136.136) 21 ms 18 ms 18 ms
6 abilene-vbns.abilene.ucaid.edu (198.32.11.9) 22 ms 18 ms 22 ms
7 nycm-wash.abilene.ucaid.edu (198.32.8.46) 22 ms 22 ms 22 ms
8 62.40.103.253 (62.40.103.253) 104 ms 109 ms 106 ms
9 de2-1.de1.de.geant.net (62.40.96.129) 109 ms 102 ms 104 ms
10 de.fr1.fr.geant.net (62.40.96.50) 113 ms 121 ms 114 ms
11 renater-gw.fr1.fr.geant.net (62.40.103.54) 112 ms 114 ms 112 ms
12 nio-n2.cssi.renater.fr (193.51.206.13) 111 ms 114 ms 116 ms
13 nice.cssi.renater.fr (195.220.98.102) 123 ms 125 ms 124 ms
14 r3t2-nice.cssi.renater.fr (195.220.98.110) 126 ms 126 ms 124 ms
15 eurecom-valbonne.r3t2.ft.net (193.48.50.54) 135 ms 128 ms 133 ms
16 194.214.211.25 (194.214.211.25) 126 ms 128 ms 126 ms
17 ***
18 ***
19 fantasia.eurecom.fr (193.55.113.142) 132 ms 128 ms 136 ms
  
```

trans-oceanic link


* means no response (probe lost, router not replying)

* Do some traceroutes from exotic countries at www.traceroute.org

Introduction 1-55

Packet loss

- ❖ queue (aka buffer) preceding link in buffer has finite capacity
- ❖ packet arriving to full queue dropped (aka lost)
- ❖ lost packet may be retransmitted by previous node, by source end system, or not at all

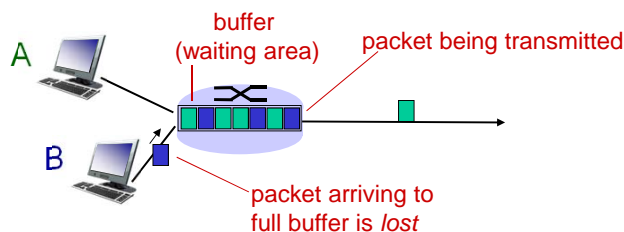


* Check out the Java applet for an interactive animation on queuing and loss

Introduction 1-56

Throughput

❖ *throughput*: rate (bits/time unit) at which bits transferred between sender/receiver


- *instantaneous*: rate at given point in time
- *average*: rate over longer period of time

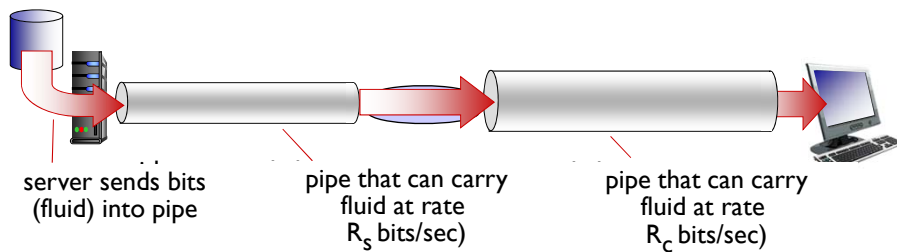


Introduction 1-57

Throughput (more)

❖ $R_s < R_c$ What is average end-end throughput?



❖ $R_s > R_c$ What is average end-end throughput?




bottleneck link

link on end-end path that constrains end-end throughput

Introduction 1-58

Throughput: Internet scenario

- ❖ per-connection end-end throughput: $\min(R_c, R_s, R/10)$
- ❖ in practice: R_c or R_s is often bottleneck

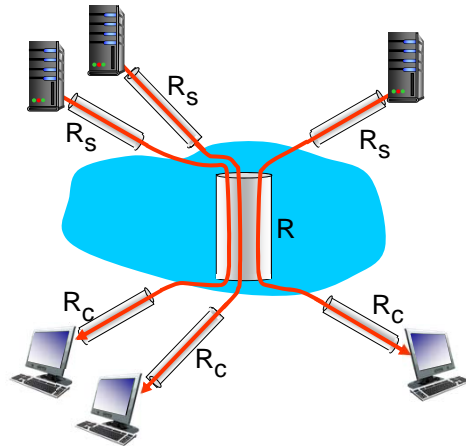

10 connections (fairly) share
backbone bottleneck link R bits/sec

Introduction 1-59

Chapter 1: roadmap

- 1.1 what is the Internet?
- 1.2 network edge
 - end systems, access networks, links
- 1.3 network core
 - packet switching, circuit switching, network structure
- 1.4 delay, loss, throughput in networks
- 1.5 protocol layers, service models
- 1.6 networks under attack: security
- 1.7 history

Introduction 1-60

Protocol “layers”

*Networks are complex,
with many “pieces”:*

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software


Question:

is there any hope of
organizing structure of
network?

.... or at least our
discussion of networks?

Introduction 1-61


Example of layering

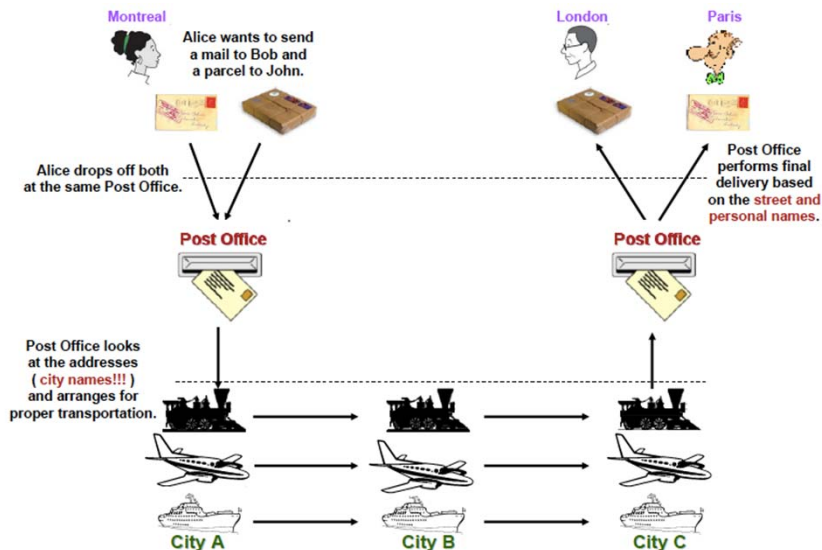


Introduction 1-62

Why layering?

- ❖ Without layering - each new application has to be re-implemented for every network technology



- ❖ With layering – intermediate layer(s) provide a unique abstraction for various network technologies

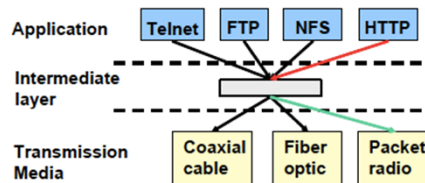

Introduction 1-63

Benefits of layering

- ❖ better managing of complex systems
- ❖ explicit structure allows identification, relationship of complex system's pieces
 - layered *reference model* for discussion
- ❖ modularization eases maintenance, updating of system
 - change of implementation of layer's service transparent to rest of system
 - e.g., change in gate procedure doesn't affect rest of system

Introduction 1-64


Layered Architecture

- ❖ Protocol layering
 - grouping of related communication functions into hierarchical set of layers
- ❖ Each layer:
 - Performs a subset of functions required for communication with another system
 - Relies on next lower layer to perform more primitive functions
 - Provides service to next higher layer
 - Implements protocol for communication with peer layer in other systems

Introduction 1-65

Layered Architecture


- ❖ Vertical communication – communication between adjacent layer
 - Requires mutual understanding of what services and/or information lower layer must provide to layer above
- ❖ Horizontal communication – communication between software or hardware elements running at the same layer on different machine

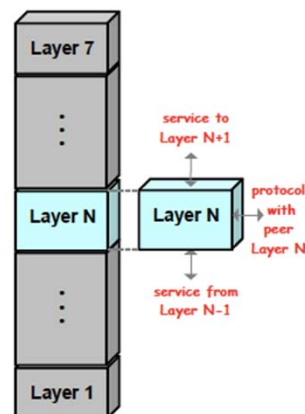

Introduction 1-66

Internet protocol stack


- ❖ **application**: supporting network applications
 - FTP, SMTP, HTTP
- ❖ **transport**: process-process data transfer
 - TCP, UDP
- ❖ **network**: routing of datagrams from source to destination
 - IP, routing protocols
- ❖ **link**: data transfer between neighboring network elements
 - Ethernet, 802.111 (WiFi), PPP
- ❖ **physical**: bits “on the wire”

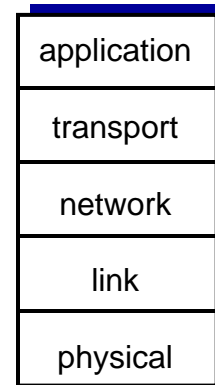

Introduction 1-67



ISO/OSI reference model

- ❖ **presentation**: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- ❖ **session**: synchronization, checkpointing, recovery of data exchange
- ❖ Internet stack “missing” these layers!
 - these services, *if needed*, must be implemented in application
 - needed?

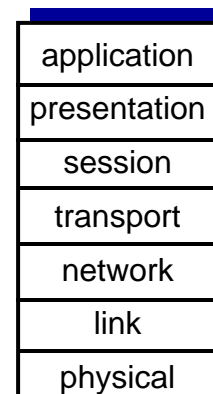

Introduction 1-68

OSI & TCP/IP Protocol Suite

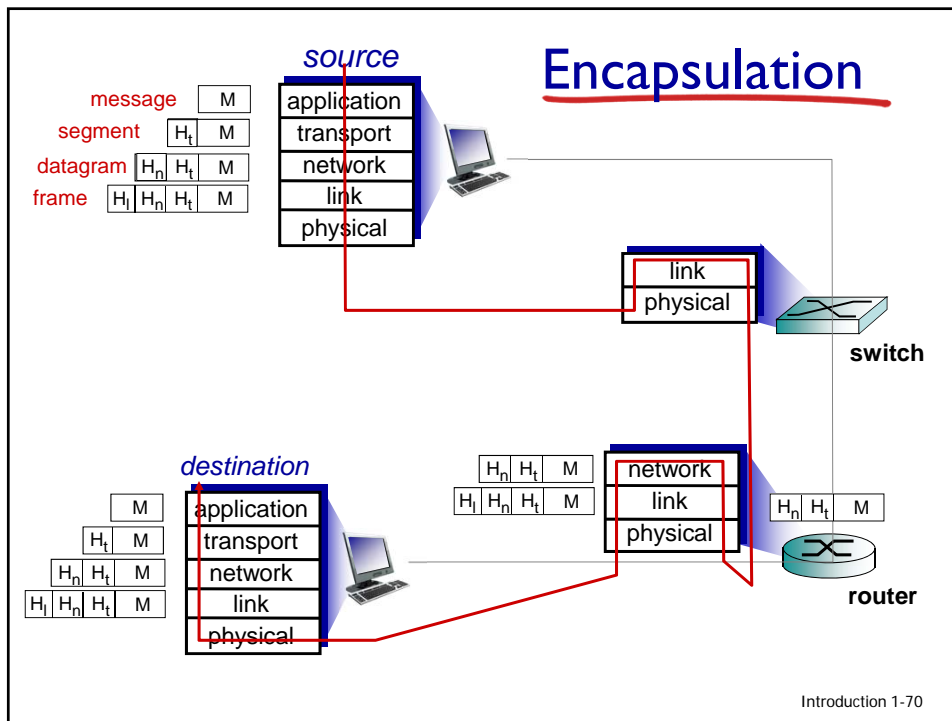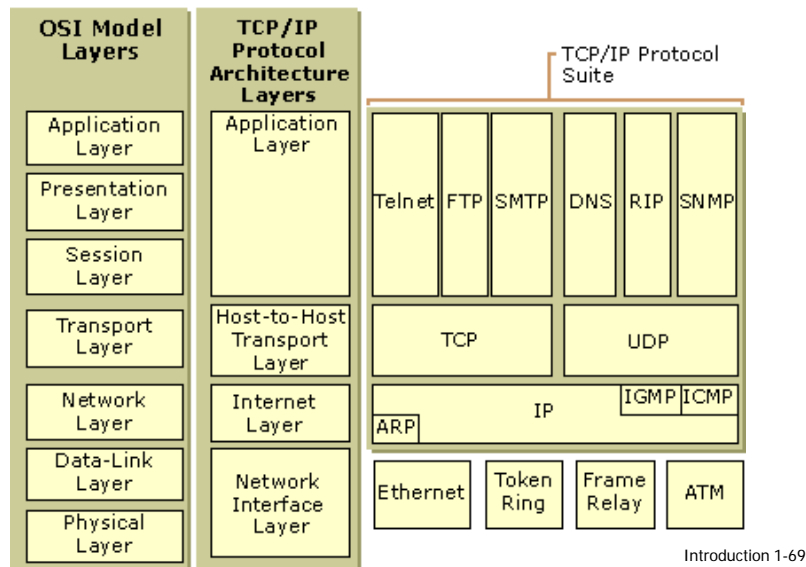

Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security

1.7 history

Introduction 1-71

Network security

❖ field of network security:

- how bad guys can attack computer networks
- how we can defend networks against attacks
- how to design architectures that are immune to attacks

❖ Internet not originally designed with (much) security in mind

- *original vision*: “a group of mutually trusting users attached to a transparent network” 😊
- Internet protocol designers playing “catch-up”
- security considerations in all layers!

Introduction 1-72

Bad guys: put malware into hosts via Internet


- ❖ malware can get in host from:
 - *virus*: self-replicating infection by receiving/executing object (e.g., e-mail attachment)
 - *worm*: self-replicating infection by passively receiving object that gets itself executed
- ❖ *spyware malware* can record keystrokes, web sites visited, upload info to collection site
- ❖ infected host can be enrolled in *botnet*, used for spam. DDoS attacks

Introduction 1-73

Bad guys: attack server, network infrastructure

Denial of Service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets to target from compromised hosts

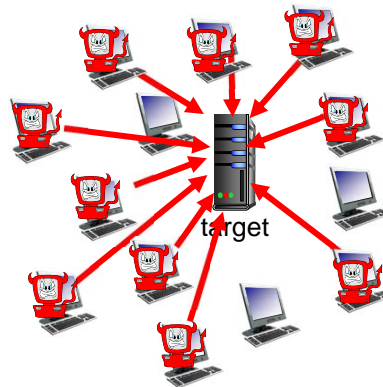


Introduction 1-74

Bad guys can sniff packets

packet "sniffing":

- broadcast media (shared ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

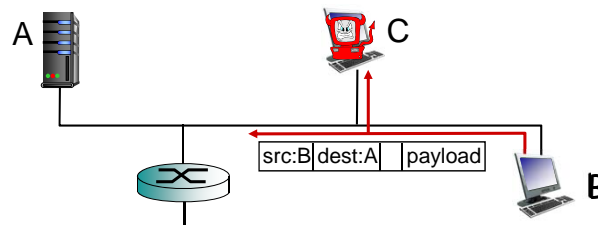


- ❖ wireshark software used for end-of-chapter labs is a (free) packet-sniffer

Introduction 1-75

Bad guys can use fake addresses

IP spoofing: send packet with false source address

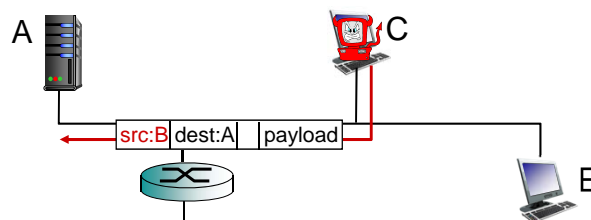

... lots more on security (throughout, Chapter 8)

Introduction 1-76

Chapter 1: roadmap

1.1 what is the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security

1.7 history

Introduction 1-77


Internet history

1961-1972: Early packet-switching principles

- ❖ **1961:** Kleinrock - queueing theory shows effectiveness of packet-switching
 - ❖ **1964:** Baran - packet-switching in military nets
 - ❖ **1967:** ARPAnet conceived by Advanced Research Projects Agency
 - ❖ **1969:** first ARPAnet node operational
 - ❖ **1972:**
 - ARPAnet public demo
 - NCP (Network Control Protocol) first host-host protocol
 - first e-mail program
 - ARPAnet has 15 nodes
-
- ```

graph TD
 SRI((SRI)) --- UCLA((UCLA))
 SRI --- Stan[Stan]
 SRI --- PDP11((PDP 11))

```



## THE ARPA NETWORK

Introduction 1-78

## Internet history

### *1972-1980: Internetworking, new and proprietary nets*

- ❖ 1970: ALOHAnet satellite network in Hawaii
- ❖ 1974: Cerf and Kahn - architecture for interconnecting networks
- ❖ 1976: Ethernet at Xerox PARC
- ❖ late 70's: proprietary architectures: DECnet, SNA, XNA
- ❖ late 70's: switching fixed length packets (ATM precursor)
- ❖ 1979: ARPAnet has 200 nodes

#### Cerf and Kahn's internetworking principles:

- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

define today's Internet architecture

Introduction 1-79

## Internet history

### *1980-1990: new protocols, a proliferation of networks*

- ❖ 1983: deployment of TCP/IP
- ❖ 1982: smtp e-mail protocol defined
- ❖ 1983: DNS defined for name-to-IP-address translation
- ❖ 1985: ftp protocol defined
- ❖ 1988: TCP congestion control
- ❖ new national networks: Cset, BITnet, NSFnet, Minitel
- ❖ 100,000 hosts connected to confederation of networks

Introduction 1-80



## Internet history

### *1990, 2000 's: commercialization, the Web, new apps*

- ❖ early 1990' s: ARPAnet decommissioned
- ❖ 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- ❖ early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960' s]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990' s: commercialization of the Web
- late 1990' s – 2000' s:
  - ❖ more killer apps: instant messaging, P2P file sharing
  - ❖ network security to forefront
  - ❖ est. 50 million host, 100 million+ users
  - ❖ backbone links running at Gbps

Introduction 1-81

## Internet history

### *2005-present*

- ❖ ~750 million hosts
  - Smartphones and tablets
- ❖ Aggressive deployment of broadband access
- ❖ Increasing ubiquity of high-speed wireless access
- ❖ Emergence of online social networks:
  - Facebook: soon one billion users
- ❖ Service providers (Google, Microsoft) create their own networks
  - Bypass Internet, providing “instantaneous” access to search, email, etc.
- ❖ E-commerce, universities, enterprises running their services in “cloud” (eg, Amazon EC2)

Introduction 1-82

## Introduction: summary

### *covered a “ton” of material!*

- ❖ Internet overview
- ❖ what's a protocol?
- ❖ network edge, core, access network
  - packet-switching versus circuit-switching
  - Internet structure
- ❖ performance: loss, delay, throughput
- ❖ layering, service models
- ❖ security
- ❖ history


### *you now have:*

- ❖ context, overview, “feel” of networking
- ❖ more depth, detail to follow!

Introduction 1-83

## A note on these slides

These PPT slides were adopted from the book  
“Computer Networking: A Top Down Approach” 6<sup>th</sup>  
Edition by Jim Kurose and Keith Ross



**Computer  
Networking: A Top  
Down Approach**  
6<sup>th</sup> edition  
Jim Kurose, Keith Ross  
Addison-Wesley  
March 2012

©  
All material copyright 1996-2012  
J.F. Kurose and K.W. Ross, All Rights Reserved

Introduction 1-84