

## CSE 2021 Computer Organization

### Chapter 3

#### Arithmetic for Computers

### Arithmetic for Computers


- Operations on integers
  - Addition and subtraction
  - Multiplication and division
  - Dealing with overflow
- Floating-point real numbers
  - Representation and operations

## CSE 2021 Computer Organization

### Arithmetic Operations on Integers

#### Integer Addition & Subtraction

- Addition example:  $7 + 6$

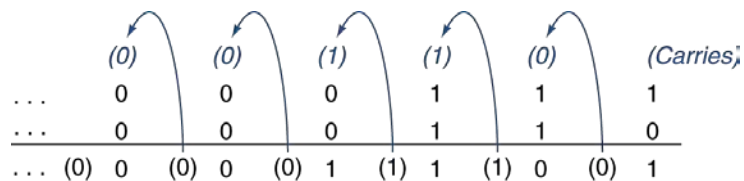

- Subtraction example:  $7 - 6 = 7 + (-6)$

- Add negation of second operand

+7:      0000 0000 ... 0000 0111

-6:      1111 1111 ... 1111 1010

+1:      0000 0000 ... 0000 0001

2's complement

## Addition of Signed Numbers

More examples below are shown for 4-bit 2's complement arithmetic.

1.	(+5)	0101	2.	(-5)	1011
	+(+2)	+0010		+(+2)	+0010
	<hr/>	<hr/>		<hr/>	<hr/>
	(+7)	0111		(-3)	1101

3.	(+5)	0101	4.	(-5)	1011
	+(-2)	+1110		+(-2)	+1110
	<hr/>	<hr/>		<hr/>	<hr/>
	(+3)	1 0011		(-7)	1 1001
		ignore the carry			ignore the carry

## Overflow

- Example: 7 + 6 (each number in signed 4-bit )

```

+ 7:  0111
+ 6:  0110
-----
+13:  1101 → -3

```


**Overflow**

- Overflow if result out of range

Operation	Operand A	Operand B	Result Indicating overflow
A+B	≥0	≥0	<0
A+B	<0	<0	≥0
A-B	≥0	<0	<0
A-B	<0	≥0	≥0

## Multiplication


- Start with long-multiplication approach

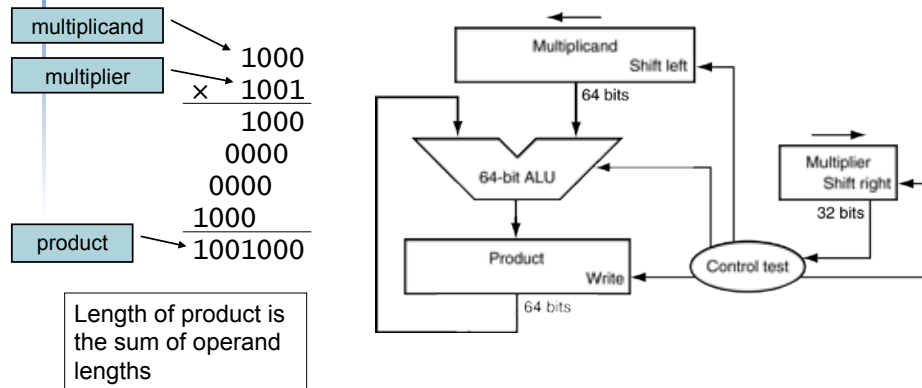

## MIPS Multiplication

- Two 32-bit registers for product
  - HI: most-significant 32 bits
  - LO: least-significant 32-bits
- Instructions
  - `mult rs, rt`
    - 64-bit product in HI/LO
  - `mfhi rd / mflo rd`
    - Move from HI/LO to rd
    - Can test HI value to see if product overflows 32 bits
  - `mul rd, rs, rt`
    - Least-significant 32 bits of product → rd

## Division

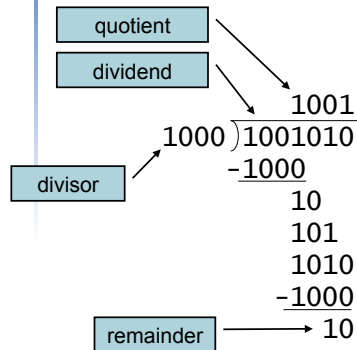

*n*-bit operands yield *n*-bit quotient and remainder

- Check for 0 divisor
- Long division approach
  - If divisor  $\leq$  dividend bits
    - 1 bit in quotient, subtract
  - Otherwise
    - 0 bit in quotient, bring down next dividend bit
- Restoring division
  - Do the subtract, and if remainder goes  $< 0$ , add divisor back
- Signed division
  - Divide using absolute values
  - Adjust sign of quotient and remainder as required

## MIPS Division

- Use HI/LO registers for result
  - HI: 32-bit remainder
  - LO: 32-bit quotient
- Instructions
  - `div rs, rt`
  - No overflow or divide-by-0 checking
    - Software must perform checks if required
  - Use `mfhi`, `mflo` to access result

## CSE 2021 Computer Organization

### Floating Point

### Floating Point

- Representation for non-integral numbers
  - Including very small and very large numbers
- Like scientific notation
  - $-2.34 \times 10^{56}$  ← normalized
  - $+0.002 \times 10^{-4}$  ← not normalized
  - $+987.02 \times 10^9$  ← not normalized
- In binary
  - $\pm 1.xxxxxx_2 \times 2^{yyyy}$
- Types float and double in C

## Floating Point Standard

- Defined by IEEE Std 754-1985
- Developed in response to divergence of representations
  - Portability issues for scientific code
- Now almost universally adopted
- Two representations
  - Single precision (32-bit)
  - Double precision (64-bit)

## IEEE Floating-Point Format

single: 8 bits  
double: 11 bits

single: 23 bits  
double: 52 bits

S	Exponent	Fraction
---	----------	----------

$$x = (-1)^S \times (1 + \text{Fraction}) \times 2^{(\text{Exponent} - \text{Bias})}$$

- S: sign bit (0 ⇒ non-negative, 1 ⇒ negative)
- Normalize significand:  $1.0 \leq |\text{significand}| < 2.0$ 
  - Always has a leading pre-binary-point 1 bit, so no need to represent it explicitly (hidden bit)
  - Significand is Fraction with the "1." restored
- Exponent: excess representation: actual exponent + Bias
  - Ensures exponent is unsigned
  - Single: Bias = 127; Double: Bias = 1203

## Single-Precision Range

- Exponents 00000000 and 11111111 reserved
- Smallest value
  - Exponent: 00000001  
 $\Rightarrow$  actual exponent =  $1 - 127 = -126$
  - Fraction: 000...00  $\Rightarrow$  significand = 1.0
  - $\pm 1.0 \times 2^{-126} \approx \pm 1.2 \times 10^{-38}$
- Largest value
  - exponent: 11111110  
 $\Rightarrow$  actual exponent =  $254 - 127 = +127$
  - Fraction: 111...11  $\Rightarrow$  significand  $\approx 2.0$
  - $\pm 2.0 \times 2^{+127} \approx \pm 3.4 \times 10^{+38}$

## Double-Precision Range

- Exponents 0000...00 and 1111...11 reserved
- Smallest value
  - Exponent: 00000000001  
 $\Rightarrow$  actual exponent =  $1 - 1023 = -1022$
  - Fraction: 000...00  $\Rightarrow$  significand = 1.0
  - $\pm 1.0 \times 2^{-1022} \approx \pm 2.2 \times 10^{-308}$
- Largest value
  - Exponent: 11111111110  
 $\Rightarrow$  actual exponent =  $2046 - 1023 = +1023$
  - Fraction: 111...11  $\Rightarrow$  significand  $\approx 2.0$
  - $\pm 2.0 \times 2^{+1023} \approx \pm 1.8 \times 10^{+308}$



## Floating-Point Precision

- Relative precision
  - all fraction bits are significant
  - Single: approx  $2^{-23}$ 
    - Equivalent to  $23 \times \log_{10}2 \approx 23 \times 0.3 \approx 6$  decimal digits of precision
  - Double: approx  $2^{-52}$ 
    - Equivalent to  $52 \times \log_{10}2 \approx 52 \times 0.3 \approx 16$  decimal digits of precision

## Activity 1

- Represent  $(-0.75)_{10}$  in single and double precision of IEEE 754 binary representation

## Activity 2

- What number is represented by the single-precision float

11000000101000...00

## Floating-Point Addition

- Consider a 4-digit decimal example
  - $9.999 \times 10^1 + 1.610 \times 10^{-1}$
- 1. Align decimal points
  - Shift number with smaller exponent
  - $9.999 \times 10^1 + 0.016 \times 10^1$
- 2. Add significands
  - $9.999 \times 10^1 + 0.016 \times 10^1 = 10.015 \times 10^1$
- 3. Normalize result & check for over/underflow
  - $1.0015 \times 10^2$
- 4. Round and renormalize if necessary
  - $1.002 \times 10^2$

## Floating-Point Addition

- Now consider a 4-digit binary example
  - $1.000_2 \times 2^{-1} + -1.110_2 \times 2^{-2}$  (0.5 + -0.4375)
- 1. Align binary points
  - Shift number with smaller exponent
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-1}$
- 2. Add significands
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-1} = 0.001_2 \times 2^{-1}$
- 3. Normalize result & check for over/underflow
  - $1.000_2 \times 2^{-4}$ , with no over/underflow
- 4. Round and renormalize if necessary
  - $1.000_2 \times 2^{-4}$  (no change) = 0.0625

## FP Instructions in MIPS

- FP hardware is coprocessor 1
  - Adjunct processor that extends the ISA
- Separate FP registers
  - 32 single-precision: \$f0, \$f1, ... \$f31
  - Paired for double-precision: \$f0/\$f1, \$f2/\$f3, ...
- FP instructions operate only on FP registers
  - Programs generally don't do integer ops on FP data, or vice versa
  - More registers with minimal code-size impact
- FP load and store instructions
  - `lwc1, ldc1, swc1, sdc1`
    - e.g., `ldc1 $f8, 32($sp)`

## FP Instructions in MIPS

- Single-precision arithmetic
  - `add.s`, `sub.s`, `mul.s`, `div.s`
    - e.g., `add.s $f0, $f1, $f6`
- Double-precision arithmetic
  - `add.d`, `sub.d`, `mul.d`, `div.d`
    - e.g., `mul.d $f4, $f4, $f6`
- Single- and double-precision comparison
  - `c.xx.s`, `c.xx.d` (`xx` is `eq`, `lt`, `le`, ...)
  - Sets or clears FP condition-code bit
    - e.g. `c.lt.s $f3, $f4`
- Branch on FP condition code true or false
  - `bc1t`, `bc1f`
    - e.g., `bc1t TargetLabel`

## Concluding Remarks

- ISAs support arithmetic
  - Signed and unsigned integers
  - Floating-point approximation to reals
- Bounded range and precision
  - Operations can overflow and underflow
- MIPS ISA
  - Core instructions: 54 most frequently used
    - 100% of SPECINT, 97% of SPECFP
  - Other instructions: less frequent