Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Routing

- Routing in the Internet – combination of rules and procedures that allow router to:
  - Inform one another of "status of" or "changes" in the network — **Routing protocol**
  - Determine "best" routing paths in the network — **Routing algorithm**
  - Transfer packets from a source host to a destination host along the best path — **Packet forwarding**
- Internet Routing Goals: accurate, rapid, low cost delivery of packets
  - Route packets away from failed and temporarily congested nodes or links
  - Avoid routing loops
  - Adapt to varying traffic loads
  - Low overhead

Interplay between routing, forwarding

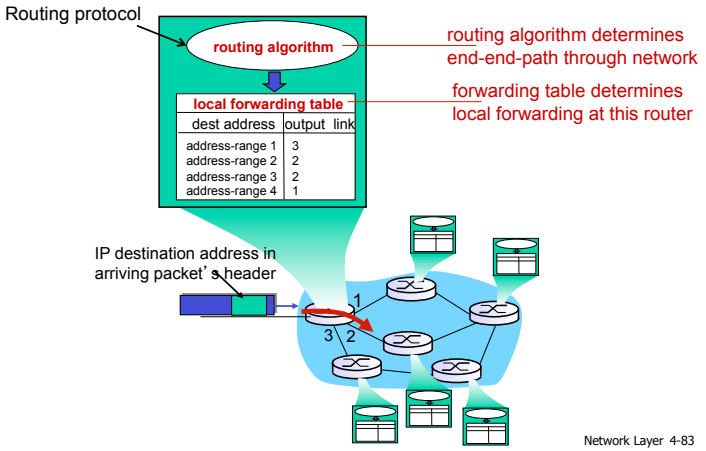

Routing Algorithm

- Routing Algorithm – heart of routing protocol, determines the best path between any two hosts in the network
  - Best path = path that minimizes the *objective function* that the network operator tries to optimize
  - Possible *objective functions*:
    1. Number of hops
    2. End-to-end delay
    3. ISP cost, …



Routing algorithm classification

Q: global or decentralized information?

global:
- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:
- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:
- routes change slowly over time

dynamic:
- routes change more quickly
  - periodic update
  - in response to link cost changes

Graph abstraction



graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

Graph abstraction: costs



c(x,x') = cost of link (x,x')
e.g., c(w,z) = 5

c(x, x) =0
c(x,y) ≥0 if nodes directly connected
Cost could be associated with bandwidth and/or congestion

cost of path $(x_1, x_2, x_3, \ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?
routing algorithm: algorithm that finds that least cost path

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k destinations

notation:

- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra's Algorithm

notation:

- c(x,y): link cost from node x to y; cost= ∞ if not direct neighbors
- D(v): current value of cost of path from source to v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

```
1  Initialization:
2   N' = {u}
3   for all nodes v
4    if v adjacent to u
5        then D(v) = c(u,v)
6    else D(v) = ∞
7
8  Loop
9   find w not in N' such that D(w) is a minimum
10  add w to N'
11  update D(v) for all v adjacent to w and not in N' :
12     D(v) = min( D(v), D(w) + c(w,v) )
13  /* new cost to v is either old cost to v or known
14   shortest path cost to w plus cost from w to v */
15 until all nodes in N'
```


Dijkstra's algorithm: example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

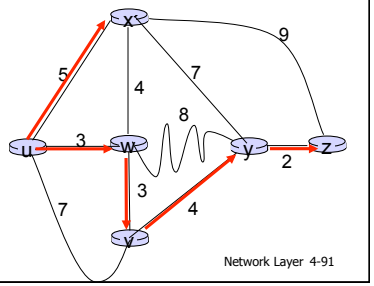

Dijkstra's algorithm: another example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					



destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Dijkstra's algorithm: example (2)

resulting shortest-path tree from u:



resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let
$d_x(y)$:= least-cost path from x to y
then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y
cost to neighbor v
min taken over all neighbors v of x

Bellman-Ford example



clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$d_u(z) = \min \{ c(u,v) + d_v(z), \; c(u,x) + d_x(z), \; c(u,w) + d_w(z) \}$$
$$= \min \{2 + 5, \; 1 + 3, \; 5 + 3\} = 4$$

node achieving minimum is next hop in shortest path, used in forwarding table

Distance vector algorithm

- $D_x(y)$ = estimate of least cost from x to y
  - x maintains distance vector $\mathbf{D}_x = [D_x(y): y \in N]$
- node x:
  - knows cost to each neighbor v: c(x,v)
  - maintains its neighbors' distance vectors. For each neighbor v, x maintains $\mathbf{D}_v = [D_v(y): y \in N]$

Distance vector algorithm

key idea:

- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v\{c(x,v) + D_v(y)\} \text{ for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ *converge to the actual least cost* $d_x(y)$

Distance vector algorithm

iterative, asynchronous:
each local iteration caused by:

- local link cost change
- DV update message from neighbor

distributed:

- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

each node:



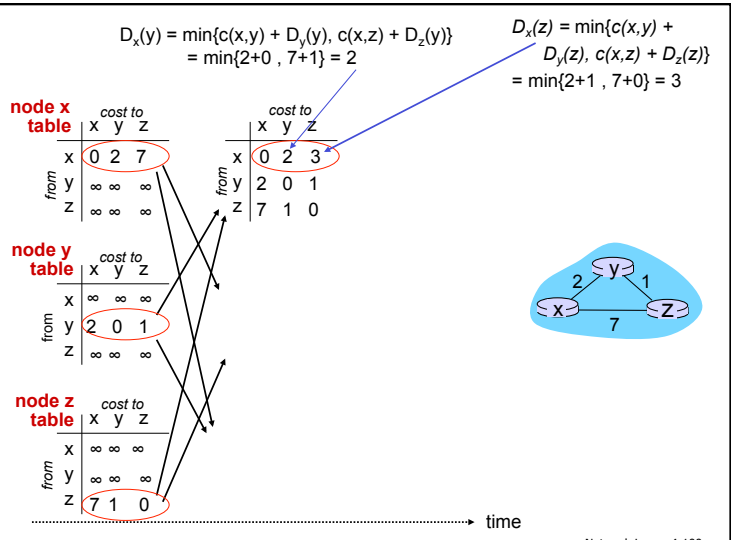

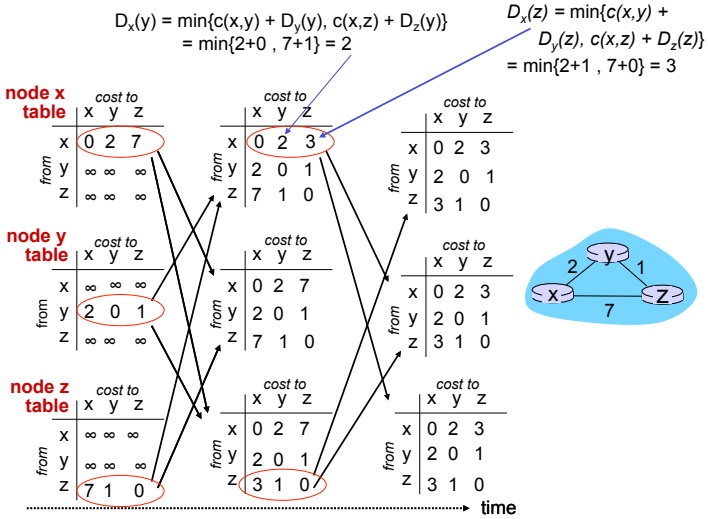

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors



"good news travels fast"

t_0: *y* detects link-cost change, updates its DV, informs its neighbors.

t_1: *z* receives update from *y*, updates its table, computes new least cost to *x* , sends its neighbors its DV.

t_2: *y* receives *z*'s update, updates its distance table. *y*'s least costs do *not* change, so *y* does *not* send a message to *z*.

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- *bad news travels slow* - "count to infinity" problem!
- 44 iterations before algorithm stabilizes: see text



poisoned reverse:

- If Z routes through Y to get to X :
  - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

Comparison of LS and DV algorithms

message complexity

- ***LS:*** with n nodes, E links, O(nE) msgs sent
- ***DV:*** exchange between neighbors only
  - convergence time varies

speed of convergence

- ***LS:*** $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- ***DV:*** convergence time varies
  - may be routing loops
  - count-to-infinity problem

robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
  - error propagate thru network