

No. 10


Virtual Memory


*Prof. Hui Jiang
Department of Computer Science and Engineering
York University*

Background

- Memory-management methods normally requires the entire process to be in memory before the process can execute.
- Better not to load the whole process in memory for execution:
 - Programs often have code to handle unusual error conditions.
 - Arrays, lists, and tables are often allocated more memory than they actually need.
 - Certain options and features of a program may be used rarely.
 - Even all codes are needed, they may not all be needed at the same time.
- Our goal: partially load a process.
 - No longer be constrained by the amount of physical memory.
 - Each process takes less memory → CPU utilization and throughput up.
 - Less I/O to load program → run faster.
- Overlay and dynamic loading can ease the restriction, but require extra work from programmers.

Logical Memory Space (review)



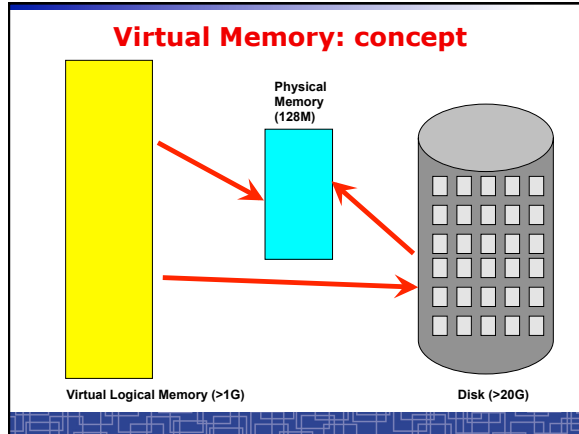


Virtual Memory

- Virtual memory can be implemented via:
 - Demand paging
 - Demand segmentation
 - Hard since segments have variable size


Demand Paging(1)

- Demand paging:
 - A paging system with a lazy page swapper.
 - A lazy swapper: never swap a page into memory unless the page will be used.
- In demand paging:
 - When a process is executed,
 - The pager guess which pages are needed. (optional)
 - The pager brings only these necessary pages into memory. (optional)
 - When referring a page not in a memory, the pager bring it in as needed and possibly replace an old page when no more free space.
- Hardware support: to distinguish those pages in memory and those pages in disk.
 - Use valid-invalid bit.

An example: Demand Paging

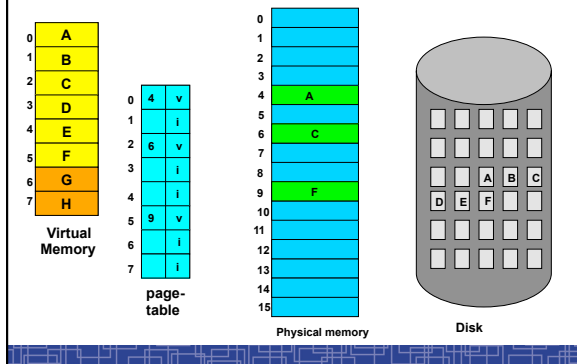

Handle a page fault

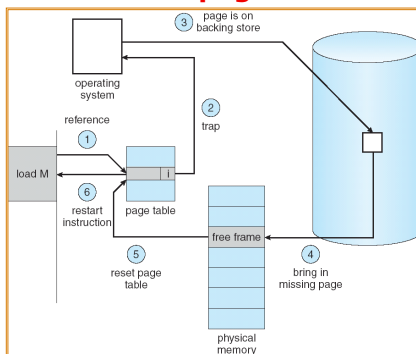

Handle a Page Fault

The interrupt service routine to handle page fault in virtual memory:

- Check an internal table to see if the reference was a valid or invalid memory access.
- If invalid, terminate the process; If valid, this page is on disk. Need page it into memory.
- Find a free frame from the free-frame list. (if no free frame, need replace an old page)
- Schedule a disk operation to read the desired page into the newly allocated frame.
- When the disk read is complete, modify the internal table and page table to set the bit as valid to indicate this page is now in memory.
- Restart the instruction that was interrupted. The process can now access the page as though it had always been in memory

Handle a Page Fault (more details)

- Trap to the OS
- Save the user registers and process status.
- Determine the interrupt was a page fault.
- Determine the location of the page on the disk.
- Find a free frame from the free-frame list.
 - If no free frame, page replacement.
- Issue a read from the disk to the free frame:
 - Wait in a queue for the disk until serviced.
 - Wait for the disk seek and latency time.
 - Begin the transfer of the page to the free frame.
- While waiting, allocate the CPU to other process.
- Interrupt from the disk (I/O completed).
- Save the registers and process state for other running process.
- Determine the interrupt was from the disk.

Handle a Page Fault (more details) (cont'd)

- ...
- Correct the page table and other tables to show the desired page is now in memory.
- Wake up the original waiting process.
- Wait for the CPU to be allocated to this process again.
- Restore the user registers and process state and new page table.
- Resume the interrupted instruction.

Pure Demand Paging vs. Pre-paging

- **Pure Demand Paging:**
 - Never bring a page into memory until it is referred.
 - Start executing a process with no pages in memory
 - OS set instruction pointer to the first instruction
 - Once run, it causes a page fault to load the first page
 - Faulting as necessary until every page is in memory
- **Pre-paging:**
 - To prevent high page-fault rate at the beginning.
 - Try to bring more pages at once based on prediction.

Performance of Demand Paging

- To service a page fault is very time-consuming:
 - Service the page-fault interrupt.
 - Read in the page.
 - Restart the process.
- Effective access time for a demand-paged system:

$$\text{Effective Access Time} = (1-p) * ma + p * \text{page fault time}$$

- One example: memory access 100 nanosecond
page fault 25 millisecond

$$\text{Effective Access Time} = 100 + 24,999,900 * p$$

If $p=1/1000$, $EAT = 25$ microsecond (slow down a factor of 250)
If requiring only 10% slow down, $p < 4/10,000,000$ (one out of 2.5 million)

- How to achieve low page fault rate??

Handling Swap Space on Disk

- For fast speed:
 - Use swap space, not file system.
 - Swap space: in larger blocks, no file lookup and indirect allocation.
 - Copying an entire file image into swap space at process startup and then perform demand paging from the swap space.
 - Or first load pages from file system, then write to swap space.


Page Replacement(1)

- In demand paging, when increasing multiprogramming level, it is possible to run out of all free frames.
- How about if a page fault occurs when no free frame is available?
 - Stop the process.
 - Swap out another process to free some frames.
 - Page replacement:
 - Replacing in page level.

Page Replacement(2)

- If no frame is free, find one frame that is not currently being used and free it.
 - Write the page into swap space and change page-table to indicate that this page is no longer in memory.
 - Use the freed frame to hold the page for which the process faulted.
- Use a page-replacement algorithm to select a victim frame.
- In this case, two disk accesses are required (one write one read).

Page Replacement

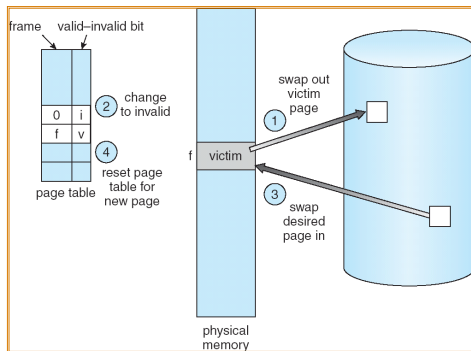


Page Replacement(3)

- Use a *modify bit (dirty bit)* to reduce overhead:
 - Each frame has a modify bit associated in hardware.
 - Any write in page will set this bit by hardware.
 - In page replacement, if the bit is not set, no need to write back to disk.
- For read-only pages, always no need to write back.
- With page replacement, we can run a large program in a small memory.
- Two important issues:
 - Page-replacement algorithm: how to select the frame to be replaced?
 - Frame-allocation algorithm: how many frames to allocate to each process?

Thrashing

- Thrashing: a process is spending a significant time in paging.
- Thrashing results in severe performance problem. The process is spending more time in paging than executing.
- Cause of thrashing:
 - The process is not allocated enough frames to hold all the pages currently in active use.

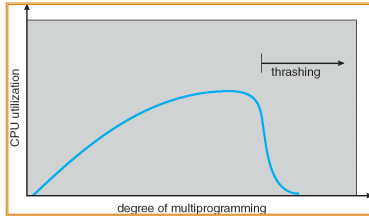

Locality Model of Programs

- A locality is a set of pages that are currently in an active use by process.
- A process moves from locality to locality.
- A program is generally composed of several different localities.
- The localities are defined by the program structure and its data structures.
- Locality model is the basic principle for caching as well as demand paging.
 - We only need a small number of frames to hold all pages in the current locality in order to avoid further page faults.

Other Considerations in demand-paging

- Program structure: a careful selection of data structure and programming structure
 - To increase locality and hence lower the page-fault rate.
 - To reduce total number of memory access.
 - To reduce total number of pages touched.
- Also compiler and loader can improve.
- Example: Array $A[1024][1024]$ of integer
 - Each row is stored in one page
 - Program 1


```
for j = 1 to 1024 do
  for i = 1 to 1024 do
    A[i][j] = 0;
```

1024 x 1024 page faults
 - Program 2


```
for i = 1 to 1024 do
  for j = 1 to 1024 do
    A[i][j] = 0;
```

1024 page faults
